

About the Q-50-EC-STD


The Q Series 50-EC-230 is a suitable choice for ceiling heights up to 50 ft., providing an area of coverage of up to 2000 sq. ft.

Q-50-EC-STD Control Types

The Q-50-EC-STD uses an electrically commutated (EC) motor and can be controlled with a 0-10VDC signal.



Velocity Profile

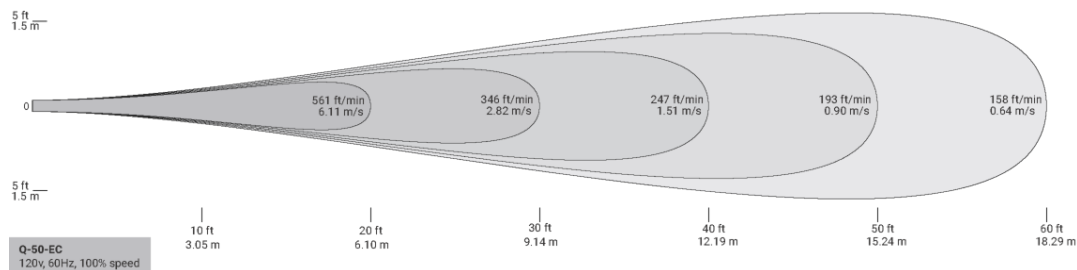

Data represents 80th percentile of 2000+ samples collected via hot wire anemometer recorded horizontally

Alternative Fan Models (Similar to Q-50-EC-STD-200-240-W)

Alternative Body Styles: Q Series

Alternative Sizes: 50

Alternative Motors: EC

Alternative Nozzles: STD

Alternative Voltages: 120V, 230V, 277V

Alternative Colors: Off White, Black

Contact

811 S. Sherman St., Longmont, CO 80501

Web: airiusfans.com

Phone: 888-AIR-PEAR (247-7327)

Fax: 303-772-8276

Product Description

Airius fans create uniform air temperatures from floor to ceiling for thermal comfort and energy savings.

Housing: PC/ABS, 5VA flame resistance. Off White


Motor: Electrically commutated, thermally-protected axial motor by ebm-papst®, 92% efficient. Operating temperature: -40°F (-40°C) to 176°F (80°C)

Stator: Patented multi-vane stator significantly increases air throw for maximizing performance.

Certification: Conforms to UL-507, CAN/CSA-C22.2 No. 1113, UL 94 5VA and is ETL listed in USA and Canada

Safety Cable: 6' length steel cable (fastened to body)

Warranty: 3 years parts and workmanship. Money back guarantee: 30 days. Refurbishment program after 3-year warranty period.

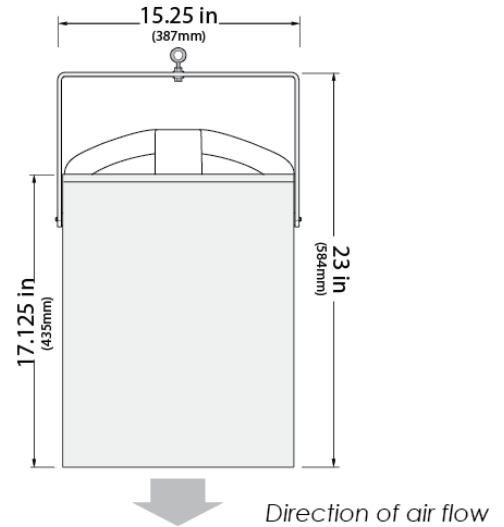

Maximum Ratings

| Model | Input Power, 1Ø | Amps | Watts | RPM | dB(A) | Mounting Height | Coverage Area |
|-------------|------------------|------|-------|------|-------|-----------------|--------------------|
| Q-50-EC-STD | 200-240VAC, 60Hz | 0.80 | 98.0 | 1660 | 73.8 | Up to 50 ft. | Up to 2000 sq. ft. |

⁽¹⁾dB as Sound Power Level, designed to meet ISO 3744 - engineering grade precision for determining sound power.
Data independently verified by third party. Tests performed in-unit.

Controls & Factory Installed Options

| Item # | Description |
|----------|------------------------------|
| Pearlink | Wi-Fi iOS/Android controller |
| POT-1 | Wall-mounted speed control |

| | |
|-----------------------------------|-------------|
| Fan Config: Q-50-EC-STD-200-240-W | QTY: |
| Controls/Options: | QTY: |
| Project: | Engineer: |
| Submitted By: | Architect: |
| Date: | Contractor: |